
Tacky thermal pad

Adhesive tacky thermal pad (35 x 35 mm), can be repositioned, to improve heat conductibility on rough surfaces. Ideal for loggers with no external probe and a flat sensing part, for surface monitoring. Do not use it in autoclave.

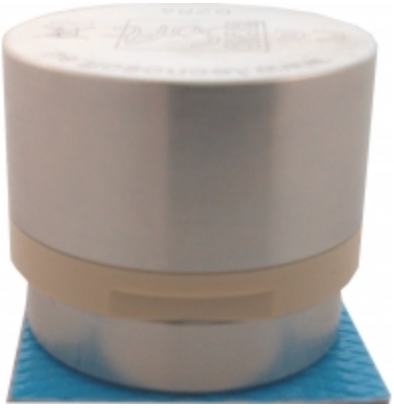

Tecnosoft srl
Via Galvani, 4, 20068, Peschiera Borromeo (MI), Italy
T: (+39) 02 2692 2888 - F: (+39) 02 2692 2875
email: info@tecnosoft.eu - web: www.tecnosoft.eu
UNI EN ISO 9001:2008 Certiquality/IQNet N. 17733