
200 temperature Smart Sensor



Smart temperature sensor for radio data logger of the DeepWave system with LoRa Wan technology, for ovens and climatic chambers starting from temperatures up to 200 ° C, with Teflon cable.

The Smart Sensor contains the calibration and identification data in its electronics: so the **recalibration process is simple and quick**: just replace the sensor that is sent to you, calibrated, before the calibration expires of the one installed, without having to request the intervention of a technician on site for calibration or having to remove the data loggers from their position to send them to a calibration laboratory.

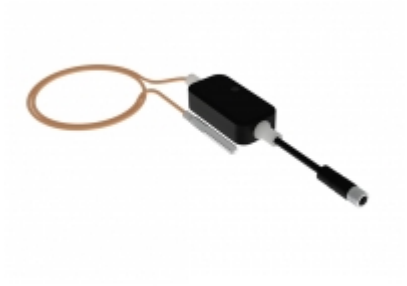

There are no additional costs!

All Smart Sensors are supplied with an **Accredia traceable calibration certificate included**.

Main features

- Standard cable length (50 cm) avilable but different rigid stainless steel probes: 30 or 80 mm, rounded or pointed
- Using the extensions it is possible to extended the cable length
- Possibility to switch sensors and devices with no calibration loss

Plus

- Easy recalibration: no need to uninstall the whole device for recalibration (sensor and unit), just disconnect the uncalibrated sensor and connect the calibrated one
- Time saving: you never loose a single minute of monitoring, since you receive the new calibrated sensor BEFORE unplugging the old one (that will be sent back to us)
- Easy to use: no configuration needed. The system recognizes automatically the sensors connected

The system

Smart Sensors of temperature up to 200°C are implemented in the DeepWave system and LoRa Wan radio nodes:

- DeepWave LoRa radio modules
- TSLog 21 software, 21 CFR compliant
- Receiver Helios

Accessories

- Gea
- Mercury
- Pluto
- Jupiter
- Saturn
- Helios - LoRa Gateway
- TS Manager
- Smart Sensor / ZED IT adapter cable extensions
- Flat DeepWave Node / Smart Sensor cable extension
- LoRa Node / Smart Sensor cable extensions

Applications

Food & Beverages

Environment

Cosmetics

Pharmaceutical

Medical

Validation

Healthcare

Warehouses

Laboratories

Logistic&Transport

Industrial

Technical specifications

Smart Sensor Dimensions	Cable 500 l X 2 Ø (mm) - Probe 30 or 80 l X 2 Ø (mm) pointed or rounded
Connection cable	100 l X 3 Ø (mm)
Sensor temperature range	0°C ÷ +200°C
Standard calibration points (temperature)	0/100/150/200°C
Extra calibration points (temperature)	Within the range 0 °C ÷ +200 °C
Temperature resolution	0,01 °C
Temperature accuracy	± 0,2 °C (within the calibration range)