


Pirani Vacuum Logger



Arguably the best data logger for **hydrogen peroxide autoclaves (plasma)** and for **freeze-drying processes** you can find today.

It has two sensors combined, one for the extreme vacuum and one for higher pressures, up to 1200 mbar: this allows to obtain an incredible accuracy of ± 0.0003 and a resolution of 0,0001 mbar.

Managed with Windows software and USB interface (DiskInterface HS). **Battery** is **user replaceable** and the data logger is **provided with an Accredia (NIST equivalent) traceable certificate** on different points.

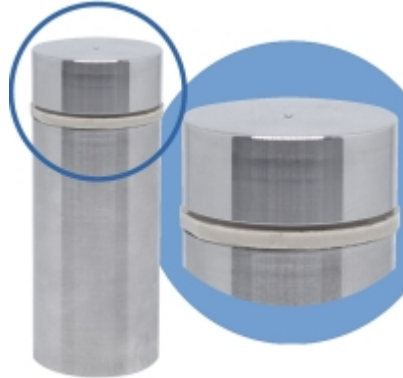

Main features

- Resists up to 85°C
- Temperature channel with internal sensor for testing
- Low battery consumption for an extended battery life
- User **replaceable battery (software shows battery status)**
- Accredia (NIST equivalent) traceable calibration certificate included
- Possibility to order **extended calibration from -60°C** (order extra calibration points)

Plus

- Extremely high accuracy and precision in extreme vacuum
- Easy to use
- Battery with extremely extended life
- Printed reports compliant with health regulations and ISO (data are not editable in the software)

The system

System's components are:

- Pirani Vacuum Logger pressure datalogger
- DiskInterface HS
- TS Manager or HumiPressureDisk software

Accessories

- TS Manager
- HumiPressureDisk
- DiskInterface HS

Applications



Validation



Plasma (H2O2) Autoclave



Pharmaceutical



Laboratories



Medical



Healthcare



Sterilisation



Cosmetics



Freeze-drying

Technical specifications

Dimensions	73 h X 30 Ø (mm) - 31 Ø (mm) PEEK ring
Weight	160 g
Materials	Stainless steel AISI316L, PEEK
Temperature range	-80 °C ÷ +85 °C
Standard calibration points (temperature)	0/25/50/75°C
Extra calibration points (temperature)	Range -80°C ÷ + 85°C
Temperature resolution	0,01 °C
Temperature accuracy	± 0,1 °C from 0 °C to +85 °C
Pressure range	0,001 mbar ÷ 1200 mbar absolute
Standard calibration points (pressure)	2.0 e ⁻³ / 5.0 e ⁻³ / 2.0 e ⁻² / 5.0 e ⁻² / 2.0 e ⁻¹ / 5.0 e ⁻¹ / 2 / 5 / 25 / 50 / 300 / 500 / atmospheric pressure mbar @ 20°C / t. amb. (25°C +/-10°C) / 50°C / 80°C
Extra calibration points (pressure)	Within the range 0.01 mbar ÷ 1200 mbar absolute
Pressure resolution	0,0001 mbar
Pressure accuracy	± 0,0005 (0,001 ÷ 0,005) / ± 0,0003 (0,005 ÷ 0,01) / ± 0,01 (0,01 ÷ 0,1) / ± 0,05 (0,1 ÷ 0,5) / ± 0,1 (0,5 ÷ 1) / ± 0,5 (1 ÷ 5) / ± 2 (5 ÷ 100) / ± 3 (100 ÷ 500) / ± 5 (500 ÷ 1000); all values in mbar
Memory (n. of acquisitions)	43.690
Acquisition step	From 1 every second up
Battery life	+19.000.000 acquisitions at 1 second step continuously (calculated time @25°C. Battery life may be shorter if used in low temperatures)
Accessories	DiskInterface HS